

ER200G ~ER206G


GLASS PASSIVATE JUNCTION SUPERFAST RECOVERY RECTIFIERS

VOLTAGE 50 to 600 Volts CURRENT 2.0 Ampere



DO-15

Unit: inch(mm)

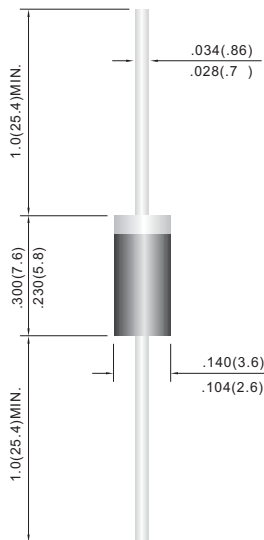

FEATURES

- Superfast recovery times-epitaxial construction.
- Low forward voltage, high current capability.
- Exceeds environmental standards of MIL-S-19500/228.
- Hermetically sealed.
- Low leakage.
- High surge capability.
- Plastic package has Underwriters Laboratories Flammability Classification 94V-O utilizing Flame Retardant Epoxy Molding Compound.
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: Molded plastic, DO-15
- Terminals: Axial leads, solderable to MIL-STD-750, Method 2026
- Polarity: Color Band denotes cathode end
- Mounting Position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.

PARAMETER	SYMBOL	ER200G	ER201G	ER201AG	ER202G	ER203G	ER204G	ER206G	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	150	200	300	400	600	V
Maximum RMS Voltage	V_{RMS}	35	70	105	140	210	280	420	V
Maximum DC Blocking Voltage	V_{DC}	50	100	150	200	300	400	600	V
Maximum Average Forward Current .375"(9.5mm) lead length at $T_A=55^\circ C$	$I_{F(AV)}$	2.0							A
Peak Forward Surge Current : 8.3ms single half sine-wave superimposed on rated load(JEDEC method)	I_{FSM}	50							A
Maximum Forward Voltage at 2.0A	V_F	0.95				1.25		1.70	V
Maximum DC Reverse Current $T_J=25^\circ C$ at Rated DC Blocking Voltage $T_J=100^\circ C$	I_R					5.0 200			μA
Maximum Reverse Recovery Time(Note 1)	t_{rr}					35			ns
Typical Junction capacitance (Note 2)	C_J					22			pF
Typical Junction Resistance(Note 3)	$R_{\theta JA}$					40			$^\circ C / W$
Operating and Storage Temperature Range	T_J, T_{STG}	-55 to +150							$^\circ C$

NOTES: 1. Reverse Recovery Test Conditions: $I_F=.5A, I_R=1A, I_{rr}=.25A$
 2. Measured at 1 MHz and applied reverse voltage of 4.0 VDC
 3. Thermal resistance from junction to ambient and from junction to lead length 0.375"(9.5mm) P.C.B. mounted

ER200G~ER206G

RATING AND CHARACTERISTIC CURVES

