


ES1001FL~ES1006FL

SMALL SURFACE MOUNT SUPER FAST DIODES
VOLTAGE 100 to 600 Volts CURRENT 1.0 Amperes



SOD-123FL

Unit : inch(mm)

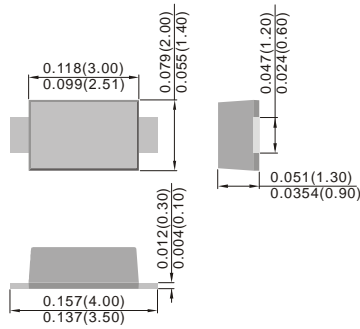


FEATURES

- For surface mounted applications
- Low profile package
- Ideal for automated placement
- Glass Passivated
- High temperature soldering : 260°C / 10 seconds at terminals
- Lead free in comply with EU RoHS 2002/95/EC directives.

MECHANICAL DATA

- Case: SOD-123FL, Plastic
- Terminals: Solderable per MIL-STD-750, Method 2026



ABSOLUTE RATINGS

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Test condition	Symbol	ES1001FL	ES1002FL	ES1004FL	ES1006FL	Units
Marking Code		-	E1B	E1D	E1G	E1J	-
Maximum repetitive peak reverse voltage		V_{RRM}	100	200	400	600	V
Maximum RMS voltage		V_{RMS}	70	140	280	420	V
Maximum DC blocking voltage		V_R	100	200	400	600	V
Maximum average forward current	$T_L=120^\circ C$	$I_{F(AV)}$	1				A
Peak forward surge current 8.3ms single half sine-wave	$T_L=25^\circ C$	I_{FSM}	30				A
Maximum instantaneous forward voltage	1.0A	V_F	0.95		1.25	1.7	V
Maximum DC reverse current at rated DC blocking voltage	$T_J=25^\circ C$ $T_J=100^\circ C$	I_R		5 10			μA
Reverse recovery time	$I_F=0.5A$ $I_R=1A$ $I_{RR}=0.25A$	T_{RR}		35			ns
Typical capacitance	4V,1MHz	C_J		7			pF

ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	ES1001FL	ES1002FL	ES1004FL	ES1006FL	Units
Thermal resistance junction to ambient air	$R_{\theta JA}$ $R_{\theta JC}$		165 20			$^\circ C/W$
Operating junction and storage temperature range	T_J, T_{STG}		-55 to +150			$^\circ C$

ES1001FL~ES1006FL

RATING AND CHARACTERISTIC CURVES

