

ZMM55C2V4~ZMM55C75



SURFACE MOUNT ZENER DIODES

VOLTAGE 2.4 to 75 Volts POWER 500 mWatts



MINI-MELF/LL-34

Unit : inch (mm)

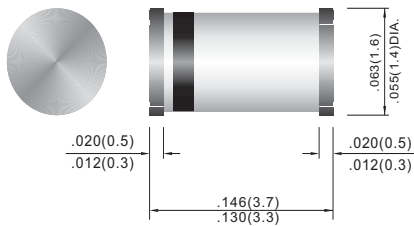

FEATURES

- Planar Die construction
- 500mW Power Dissipation
- Ideally Suited for Automated Assembly Processes
- Lead free in comply with EU RoHS 2011/65/EU directives

MECHANICAL DATA

- Case: Molded Glass MINI-MELF
- Terminals: Solderable per MIL-STD-750, Method 2026
- Polarity: See Diagram Below
- Approx. Weight: 0.03 grams
- Mounting Position: Any
- Packing information

T/R - 2.5K per 7" plastic Reel

T/R - 10K per 13" plastic Reel

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Power Dissipation at TA = 25°C	P _{TOT}	500	mW
Junction Temperature	T _J	175	°C
Storage Temperature Range	T _S	-65 to +175	°C

Parameter	Symbol	Min.	Typ.	Max.	Units
Thermal Resistance Junction to Ambient Air	R _{θJA}	--	--	0.3	°C/mW
Forward Voltage at I _F = 200mA	V _F	--	--	1.5	V

ZMM55C2V4~ZMM55C75

Part Number	Nominal Zener Voltage			Max. Zener Impedance				Max Reverse Leakage Current		Marking code
	Vz @ IzT			ZzT @ IzT		Zzk @ Izk		IR @ VR		
	Nom. V	Min. V	Max. V	Ω	mA	Ω	mA	μA	V	
ZMM55-C2V4	2.4	2.28	2.56	85	5	600	1	50	1	-
ZMM55-C2V7	2.7	2.5	2.9	85	5	600	1	10	1	-
ZMM55-C3V0	3	2.8	3.2	85	5	600	1	4	1	-
ZMM55-C3V3	3.3	3.1	3.5	85	5	600	1	2	1	-
ZMM55-C3V6	3.6	3.4	3.8	85	5	600	1	2	1	-
ZMM55-C3V9	3.9	3.7	4.1	85	5	600	1	2	1	-
ZMM55-C4V3	4.3	4	4.6	75	5	600	1	1	1	-
ZMM55-C4V7	4.7	4.4	5	60	5	600	1	0.5	1	-
ZMM55-C5V1	5.1	4.8	5.4	35	5	550	1	0.1	1	-
ZMM55-C5V6	5.6	5.2	6	25	5	450	1	0.1	1	-
ZMM55-C6V2	6.2	5.8	6.6	10	5	200	1	0.1	2	-
ZMM55-C6V8	6.8	6.4	7.2	8	5	150	1	0.1	3	-
ZMM55-C7V5	7.5	7	7.9	7	5	50	1	0.1	5	-
ZMM55-C8V2	8.2	7.7	8.7	7	5	50	1	0.1	6	-
ZMM55-C9V1	9.1	8.5	9.6	10	5	50	1	0.1	7	-
ZMM55-C10	10	9.4	10.6	15	5	70	1	0.1	7.5	-
ZMM55-C11	11	10.4	11.6	20	5	70	1	0.1	8.5	-
ZMM55-C12	12	11.4	12.7	20	5	90	1	0.1	9	-
ZMM55-C13	13	12.4	14.1	26	5	110	1	0.1	10	-
ZMM55-C15	15	13.8	15.6	30	5	110	1	0.1	11	-
ZMM55-C16	16	15.3	17.1	40	5	170	1	0.1	12	-
ZMM55-C18	18	16.8	19.1	50	5	170	1	0.1	14	-
ZMM55-C20	20	18.8	21.2	55	5	220	1	0.1	15	-
ZMM55-C22	22	20.8	23.3	55	5	220	1	0.1	17	-
ZMM55-C24	24	22.8	25.6	80	5	220	1	0.1	18	-
ZMM55-C27	27	25.1	28.9	80	5	220	1	0.1	20	-
ZMM55-C30	30	28	32	80	5	220	1	0.1	22	-
ZMM55-C33	33	31	35	80	5	220	1	0.1	24	-
ZMM55-C36	36	34	38	80	5	220	1	0.1	27	-
ZMM55-C39	39	37	41	90	2.5	500	1	0.1	30	-
ZMM55-C43	43	40	46	90	2.5	600	1	0.1	33	-
ZMM55-C47	47	44	50	110	2.5	700	1	0.1	36	-
ZMM55-C51	51	48	54	125	2.5	700	0.5	0.1	39	-
ZMM55-C56	56	52	60	135	2.5	1000	0.5	0.1	43	-
ZMM55-C62	62	58	66	150	2.5	1000	0.5	0.1	47	-
ZMM55-C68	68	64	72	200	2.5	1000	0.5	0.1	51	-
ZMM55-C75	75	70	79	250	2.5	1500	0.5	0.1	56	-

Notes.

- STANDARD VOLTAGE TOLERANCE IS + 5% AND :
- SUFFIX " A " FOR + 1%
- SUFFIX " B " FOR + 2%
- SUFFIX " C " FOR + 5%
- SUFFIX " D " FOR + 20%

ZMM55C2V4~ZMM55C75

RATING AND CHARACTERISTIC CURVES

